


**IC-F3011** (VHF transceiver)

**IC-F4011** (UHF transceiver)

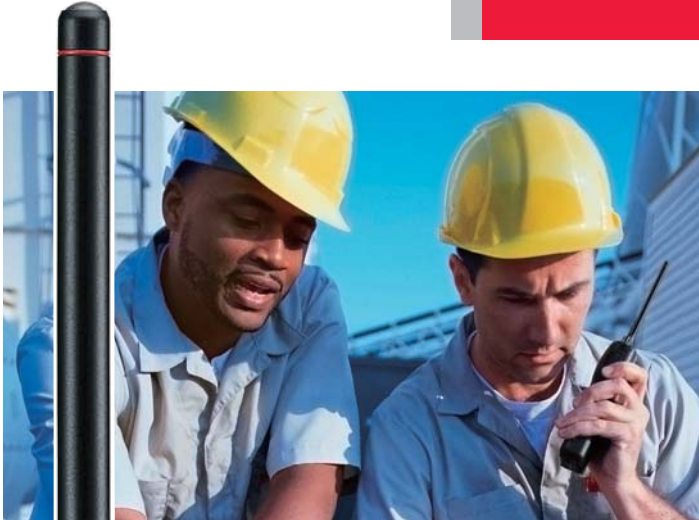

**IP54**

Rugged

**MIL-STD 810**



◀ IC-F3011(VHF)

## Simple, Rugged & Reliable at an unbelievable price!

### Simple operation for instant communication

With only 3 buttons, one volume knob and one 16-position channel knob, the IC-F3011 series does not require special training to use. The large knobs and positive action buttons are easy-to-operate, even while wearing gloves.

### Modern design, rugged body

The IC-F3011 series is compact (120 mm; 4.72 inch height) and light weight (approximate 300 g; 10.6 oz with BP-232H and antenna). The aluminum die-cast chassis is the basis for this rugged construction, allowing long-life usage in various environments.

### MIL-STD and IP54 rugged construction

The radio is tested to MIL-STD 810 specifications and to the IP54 rating for dust protection and water resistance. The IC-F3011 series is built to take harsh use and keep working.

### Lithium-ion battery standard

The IC-F3011 series comes with a high capacity 2300 mAh (typ.) Li-ion battery pack, BP-232H, as standard. The BP-232H offers up to 21 hours\* of operation.

\* VHF typical operation with Tx:Rx:Stand-by ratio =5:5:90

### CTCSS/DTCS tone encoder/decoder

The IC-F3011 series has the built-in CTCSS and DTCS capabilities as standard to access a repeater or to set up your own talk group for quiet stand-by.

### Rapid battery charger supplied

The rapid desktop charger, BC-160 and AC adapter BC-123SA is supplied with the radio. It charges the BP-232H Li-Ion battery in 3 hours (approx.).

### Automatic scanning and priority scan

The power on scan function automatically starts scanning when turning on the radio. The priority scan function scans all programmed channels in sequence, while monitoring the priority channel.

### Other features

- Low battery alert with blinking LED and low battery beep
- Wide frequency coverage (136–174, 400–470 and 450–512 MHz)
- PC programmable
- 3-color LED (Red, Green, Orange)
- Talk around function
- Time out timer
- Optional VOX headset
- 2-step power save

**SPECIFICATIONS**

	IC-F3011	IC-F4011
<b>GENERAL</b>		
Frequency coverage	136–174 MHz	400–470 MHz 450–512 MHz
No. of channels	16 channels	
Type of emission	16K0F3E/11K0F3E	
Channel spacing	25/12.5 kHz, 30/15 kHz	25/12.5 kHz
Power supply requirement	7.2 V DC nominal	
Current drain		
Tx High	1.5 A (at 5 W)	1.6 A (at 4 W)
Rx Max. audio/Standby	300 mA/70 mA	300 mA/70 mA
Antenna impedance	50 Ω	
Operating temperature range	–30 °C to +60 °C; –22 °F to +140 °F (Radio specifications)	
Dimensions (W × H × D) (Projections not included)	53 × 120 × 38 mm; 2.1 × 4.7 × 1.5 in (With BP-232H)	
Weight (approx.)	300 g; 10.6 oz (With BP-232H)	
<b>TRANSMITTER</b>		
Output power (at 7.2 V DC)	5 W, 2 W, 1 W (Hi, L2, L1)	4 W, 2 W, 1 W (Hi, L2, L1)
Max. Frequency deviation	±5.0/±2.5 kHz (Wide/Narrow)	
Frequency stability	±2.5 ppm	
Spurious emissions	80 dB typ.	
FM Hum and Noise	46/40 dB typ. (Wide/Narrow)	
Ext. microphone connector	3-conductor 2.5 (d) mm (1/10")/2.2 kΩ	
<b>RECEIVER</b>		
Sensitivity	0.25 μV typ. (at 12 dB SINAD)	
Adjacent channel selectivity	75/65 dB typ. (Wide/Narrow)	
Spurious response	70 dB min.	
Intermodulation rejection	74 dB typ.	
Hum and noise	55/50 dB typ. (W/N)	45/40 dB typ. (W/N)
Audio output power	500 mW typ. (at 5% dist, 8 Ω load)	
External speaker connector	2-conductor 3.5 (d) mm (1/8")/8 Ω	

Measurements made in accordance with TIA-603. All stated specifications are subject to change without notice or obligation.  
 \* 25kHz bandwidth is no longer available for FCC Part 90 licensees for USA versions. Ask your dealer if you need 25kHz bandwidth.

**Applicable U.S. Military Specifications & IP Rating**

Standard	MIL 810 F	
	Method	Procedure
Low Pressure	500.4	I, II
High Temperature	501.4	I, II
Low Temperature	502.4	I, II
Temperature Shock	503.4	I
Solar Radiation	505.4	I
Rain	506.4	I, II
Humidity	507.4	–
Salt Fog	509.4	–
Dust	510.4	I
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D and -E.

**Ingress Protection Standard**

Dust & Water	IP54 (Dust-protection and water resistance)
--------------	---

**Supplied accessories:**

- Battery pack, BP-232H
- Belt clip, MB-94
- Battery charger, BC-160
- AC adapter, BC-123SA
- Antenna (varies by versions)

**OPTIONS**



Battery packs	Type	Capacity	Operating time*
BP-230N	Rechargeable Li-ion	950 mAh (min.) 980 mAh (typ.)	9 hours (Approximate)
BP-232H	Rechargeable Li-ion	2250 mAh (min.) 2300 mAh (typ.)	21 hours (Approximate)
BP-240	AAA (LR03) batteries × 6		–


\* Tx: Rx: standby=5:5:90. Power save on. (at 20 °C; 68 °F)

**REGULAR CHARGER**



Charges the BP-232H in 10 hours (approx.).

**RAPID CHARGER**



Charges the BP-232H in 3 hours (approx.).

**MULTI-CHARGER**



Charges up to six BP-232H battery packs in 3 hours (approx.).

\*1 BC-123/BC-147SA for USA plug. SE for Europe plug. SV for Australia plug.

**SPEAKER-MICROPHONES**




**EARPHONE-MICROPHONES**



**EARPHONES**



**HEADSETS (VS-1L required)**

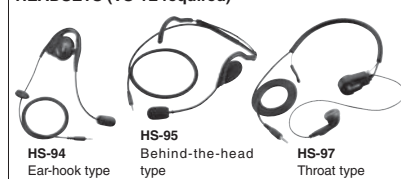

**PTT/VOX UNIT**



**CHARGER BRACKET**



**LEATHER BELT HANGERS**



**BELT CLIPS**



**STUBBY ANTENNAS**

- FA-SC56VS: 150–162 MHz
- FA-SC57VS: 160–174 MHz
- FA-SC73US: 450–490 MHz

**CUT ANTENNAS**

- FA-SC61VC: 136–174 MHz
- FA-SC61UC: 380–520 MHz

**HIGH GAIN ANTENNAS**

- FA-SC62V: 150–160 MHz
  - FA-SC63V: 155–165 MHz
- ANTENNAS**
- FA-SC25V: 136–150 MHz
  - FA-SC55V: 150–174 MHz
  - FA-SC25U: 400–430 MHz
  - FA-SC57U: 430–470 MHz
  - FA-SC72U: 470–520 MHz

**CIGARETTE LIGHTER CABLE & POWER SUPPLY CABLE**



**CHARGER ADAPTER**

• AD-122  
 AD-122 charger adapter is supplied with the BC-197, depending on BC-197's version.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries.

**Icom Inc.**

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

[www.icom.co.jp/world](http://www.icom.co.jp/world)

**Count on us!**

Your local distributor/dealer:

**Icom America Inc.**

12421 Willows Road NE,  
 Kirkland, WA 98034, U.S.A.  
 Phone: +1 (425) 454-8155  
 Fax: +1 (425) 454-1509  
 E-mail: [sales@icomamerica.com](mailto:sales@icomamerica.com)  
 URL: <http://www.icomamerica.com>

**Icom (Europe) GmbH**

Communication Equipment  
 Auf der Krautweide 24  
 65812 Bad Soden am Taunus, Germany  
 Phone: +49 (6196) 76685-0  
 Fax: +49 (6196) 76685-50  
 E-mail: [info@icom-europe.com](mailto:info@icom-europe.com)  
 URL: <http://www.icomeurope.com>

**Icom France s.a.s.**

Zac de la Plaine,  
 1 Rue Brindejonn des Moulains, BP 45804,  
 31505 Toulouse Cedex 5, France  
 Phone: +33 (5) 61 36 03 03  
 Fax: +33 (5) 61 36 03 00  
 E-mail: [icom@icom-france.com](mailto:icom@icom-france.com)  
 URL: <http://www.icom-france.com>

**Asia Icom Inc.**

6F No. 68, Sec. 1 Cheng-Teh Road,  
 Taipei, Taiwan, R.O.C.  
 Phone: +886 (02) 2559 1899  
 Fax: +886 (02) 2559 1874  
 E-mail: [sales@asia-icom.com](mailto:sales@asia-icom.com)  
 URL: <http://www.asia-icom.com>

**Icom Canada**

Glenwood Centre #150-6165  
 Highway 17A, Delta, B.C.,  
 V4K 5B8, Canada  
 Phone: +1 (604) 952-4266  
 Fax: +1 (604) 952-0090  
 E-mail: [info@icomcanada.com](mailto:info@icomcanada.com)  
 URL: <http://www.icomcanada.com>

**Icom Spain S.L.**

Ctra. Rubi, No. 88 "Edificio Can Castanyer"  
 Bajos A 08174, Sant Cugat del Valles,  
 Barcelona, Spain  
 Phone: +34 (93) 590 26 70  
 Fax: +34 (93) 589 04 46  
 E-mail: [icom@icomspain.com](mailto:icom@icomspain.com)  
 URL: <http://www.icomspain.com>

**Icom (Australia) Pty. Ltd.**

Unit 1 / 103 Garden Road,  
 Clayton, VIC 3168 Australia  
 Phone: +61 (03) 9549 7500  
 Fax: +61 (03) 9549 7505  
 E-mail: [sales@icom.net.au](mailto:sales@icom.net.au)  
 URL: <http://www.icom.net.au>

**Shanghai Icom Ltd.**

No.101, Building 9, Caifuxingyuan Park,  
 No.188 Maoting Road, Chedun Town,  
 Songjiang District, Shanghai, 201611, China  
 Phone: +86 (021) 6153 2768  
 Fax: +86 (021) 5765 9987  
 E-mail: [bjicom@bjicom.com](mailto:bjicom@bjicom.com)  
 URL: <http://www.bjicom.com>

**Icom Brazil**

Rua Itororó, 444 Padre Eustáquio  
 Belo Horizonte MG,  
 CEP: 30720-450, Brazil  
 Phone: +55 (31) 3582 8847  
 Fax: +55 (31) 3582 8987  
 E-mail: [sales@icombrasil.com](mailto:sales@icombrasil.com)

**Icom (UK) Ltd.**

Blacksloe House, Altira Park,  
 Herne Bay, Kent, CT6 6GZ, U.K.  
 Phone: +44 (0) 1227 741741  
 Fax: +44 (0) 1227 741742  
 E-mail: [info@icomuk.co.uk](mailto:info@icomuk.co.uk)  
 URL: <http://www.icomuk.co.uk>

**Icom New Zealand**

39C Rennie Drive, Airport Oaks,  
 Auckland, New Zealand  
 Phone: +64 (09) 274 4062  
 Fax: +64 (09) 274 4708  
 E-mail: [inquiries@icom.co.nz](mailto:inquiries@icom.co.nz)  
 URL: <http://www.icom.co.nz>